


9001 Series

DIN41612 Half R Type Female

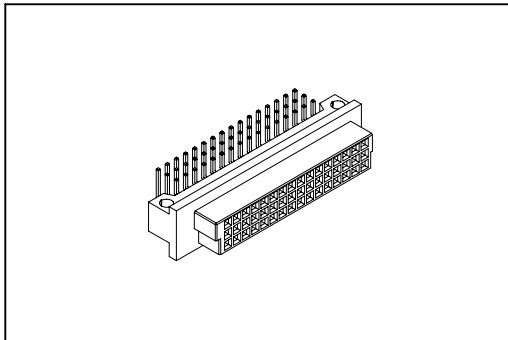

Material:

Housing: 30% Glass Filled PBT UL94V-0.

Contacts: Phosphor Bronze.

Electrical Characteristics:

Current Rating: 2 A.

Dielectric Withstanding Voltage: AC 1000V .

Insulator Resistance: 1000M Ω min.

Contact Resistance: 30m Ω max.

Operating Temperature: -55°C ~+105°C .





Features:

* UL, cUL listing.

* Mates with Male 3Row Half

9001-17 Half R Type.

9001-15 Half C Type.

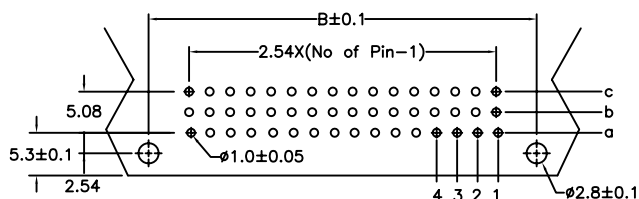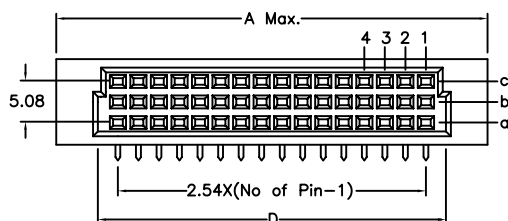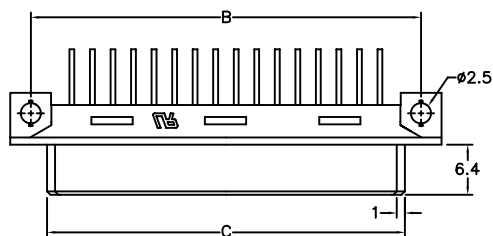

P.C. Board Layout

Dimension				
Position	A	B	C	D
48/32/16/24/8	54.00	48.26	44.40	43.20
30/15	38.80	33.02	29.20	28.00
Pitch	Position	Rows with Contacts	Contact Arrange	
2.54mm	48	a b c		
	32	a - c		
	30	a b c		
	16	a - -		
5.08mm	24	a b c		
	16	a - c		
	15	a b c		
	8	a - -		

Ordering information

9001-

Series

1

1: 2.54mm
2: 5.08mm

8

8: Female

48

Position

1

1: Dip Length

C

C: Dip Tin
Contact Gold
G: Gold

00

00: G/F
10: 10 μ "
15: 15 μ "
30: 30 μ "

L1

Blank: W/O
Lock
L1: With Lock
See Page CA04

A

A: Tray
Package

*Standard Gold Flash.