


# 9001 Series

## DIN41612 C Type Male

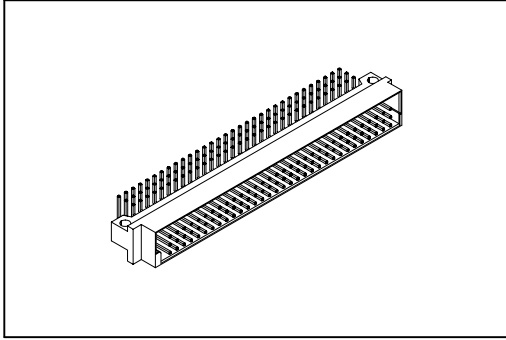

### Material:





Housing: 30% Glass Filled PBT UL94V-0.  
Contacts: Brass.

### Electrical Characteristics:

Current Rating: 2 A.  
Dielectric Withstanding Voltage: AC 1000V .  
Insulator Resistance: 1000MΩ min.  
Contact Resistance: 30mΩ max.  
Operating Temperature: -55°C~+105°C .

### Features:

- \* UL, cUL listing.
- \* Mates with Female 3Row  
9001-1296, 1264 C Type.  
9001-1496, 1464 R Type.  
9001-1264 IDC Type.

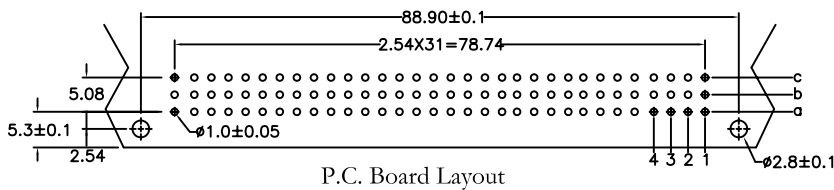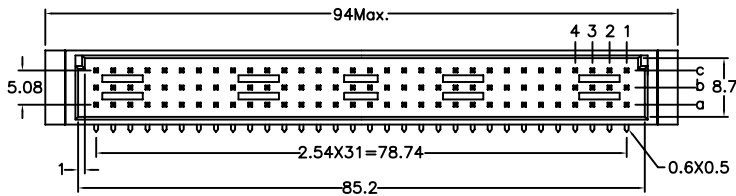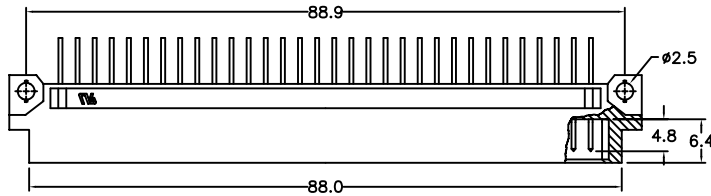

Pitch	Position	Rows with Contacts	Contact Arrange
2.54mm	96	a b c	
	64	a b -	
	64	a - c	
	32	a - -	
5.08mm	48	a b c	
	32	a b -	
	32	a - c	
	16	a - -	

## Ordering information

<b>9001-</b>	<b>1</b>	<b>1</b>	<b>96</b>	<b>1</b>	<b>C</b>	<b>00</b>	<b>L1</b>	<b>A</b>
Series	1: 2.54mm 2: 5.08mm	1: Male	Position	1: Dip Length	C: Dip Tin Contact Gold G: Gold	00: G/F 10: 10 μ" 15: 15 μ" 30: 30 μ"	Blank: W/O Lock L1: With Lock See Page CA04	A: Tray Package

\*Standard Gold Flash.  
\*32, 64 Pin Standard a - c Row.